


VERTICAL STACK HIGH RISE

ER TWINPACK / 300 - 600 CFM

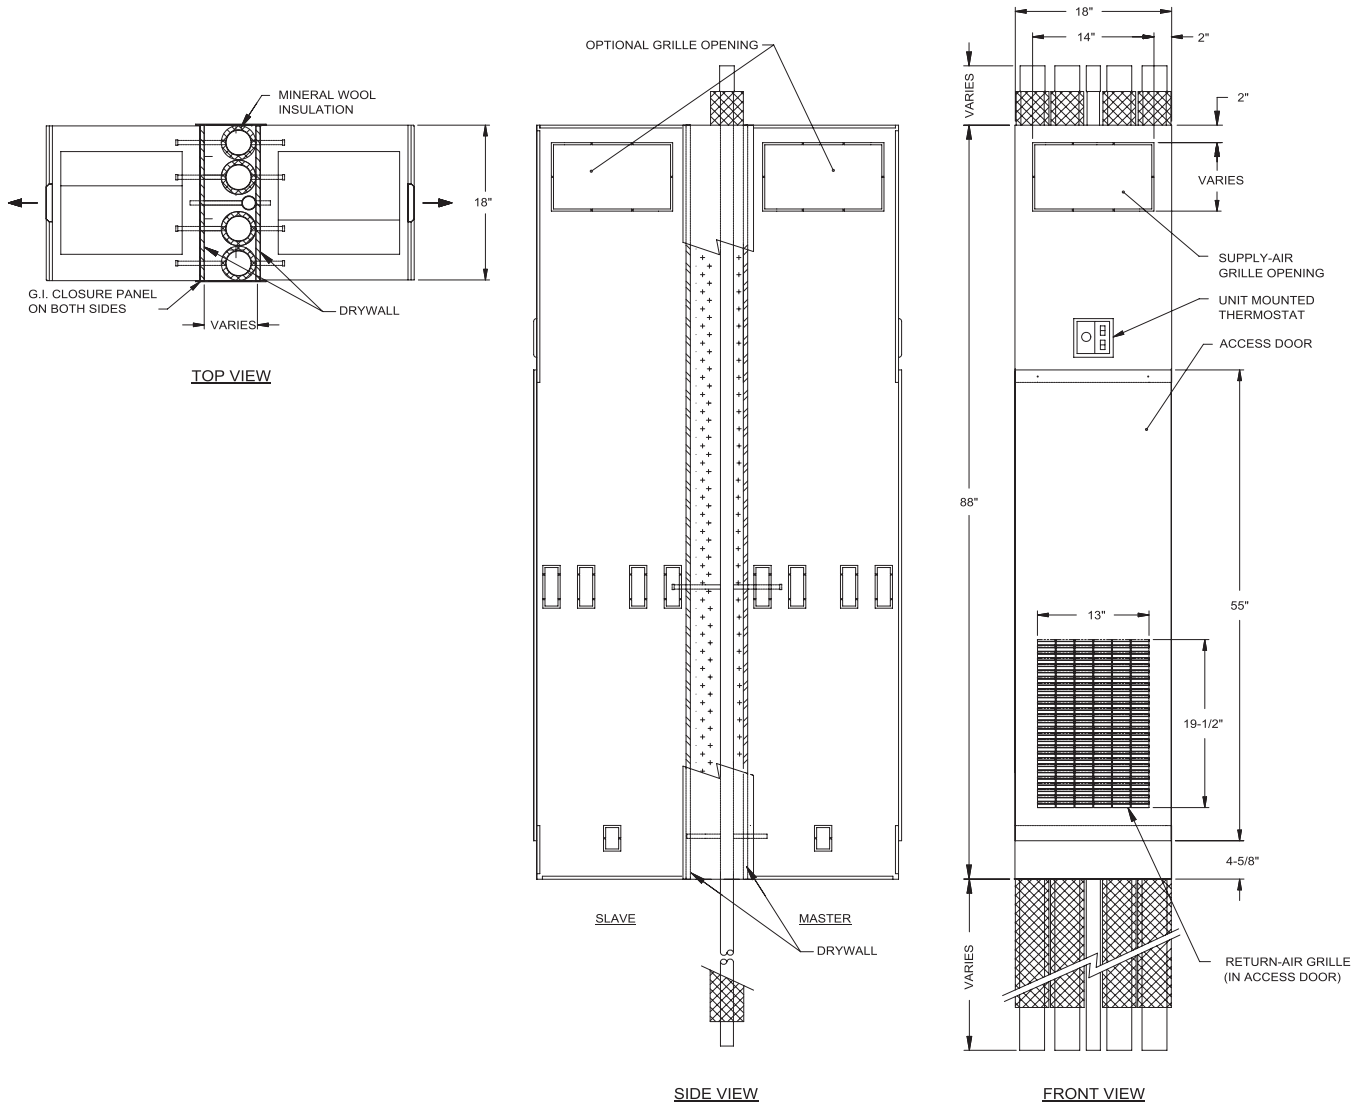

- TwinPacks include a one hour UL through penetration firestop W-L-7089 system. Local codes may dictate exact amount and placement of drywall.
- Galvanized steel support brackets are added to the top and bottom of each TwinPack for protection during shipping and handling.
- Field furnish and install approved firestop material after the units are installed at points where piping penetrates the ceiling and floor.
- Each unit operates independently with it's own valves and controls.
- The TwinPack unit is suitable for zero inch clearance to combustible materials.