# VERTICAL STACK HIGH RISE

## DR-D MASTER / 300 - 1,200 CFM

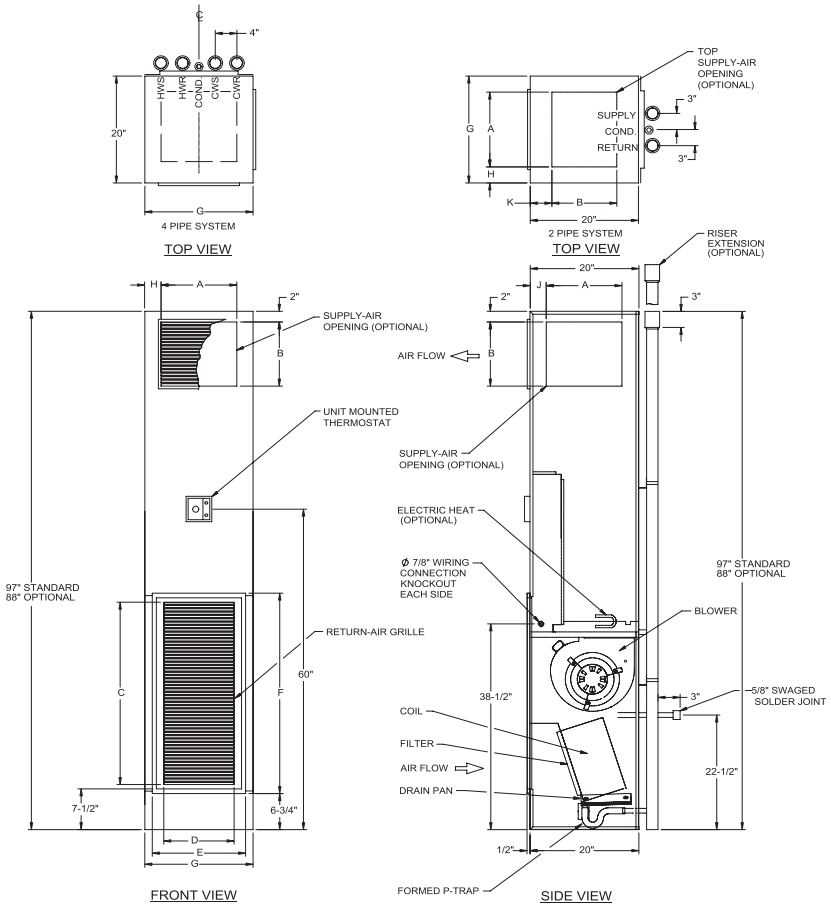


| MODEL DR-M | DISCHARGE OPENING | | RETURN AIR GRILLE | | ACCESS PANEL | | G | H | J | K | FILTER SIZE |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | B | C | D | E | F | | | | | |
| 300 | 14 | 12 | 34 | 13 | 17-1/2 | 37-1/2 | 20 | 3 | 3 | 4 | 12 x 15-1/2 x 1 |
| 400 | 14 | 12 | 34 | 13 | 17-1/2 | 37-1/2 | 20 | 3 | 3 | 4 | 12 x 15-1/2 x 1 |
| 500 | 14 | 12 | 34 | 13 | 17-1/2 | 37-1/2 | 20 | 3 | 3 | 4 | 12 x 15-1/2 x 1 |
| 600 | 16 | 14 | 34 | 17 | 20-1/2 | 37-1/2 | 24 | 4 | 2 | 3 | 12 x 15-1/2 x 1 |
| 800 | 16 | 14 | 34 | 17 | 20-1/2 | 37-1/2 | 24 | 4 | 2 | 3 | 12 x 15-1/2 x 1 |
| 1000 | 16 | 14 | 40 | 17 | 20-1/2 | 43-1/2 | 24 | 4 | 2 | 3 | 18 x 19-1/2 x 1 |
| 1200 | 16 | 14 | 40 | 17 | 20-1/2 | 43-1/2 | 24 | 4 | 2 | 3 | 18 x 19-1/2 x 1 |

· Coil connections may be right, left or rear.

· Coil connections determined by facing the return air grille.

· Electrical junction box is located above the blower and motor assembly.

· Unit must be installed level and condensate drain lines should be trapped.

· Removable drain pan is powder-coated epoxy with a 1/8" thick closed-cell insulation and has 3/4" NPT primary and secondary drain connections.

· Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.

·Coil Connections: ½" CW on DR003-006, ¾" on DR008-012 and ½" HW on DR003-012.