
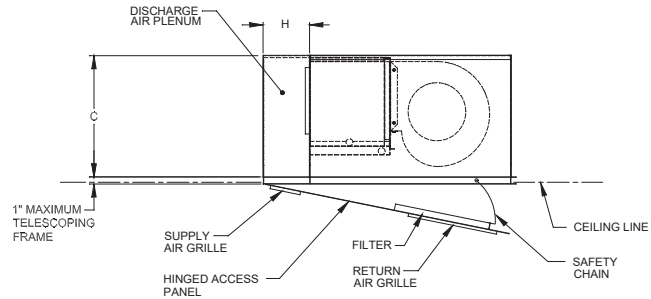
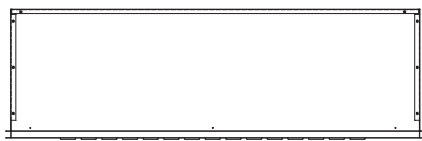
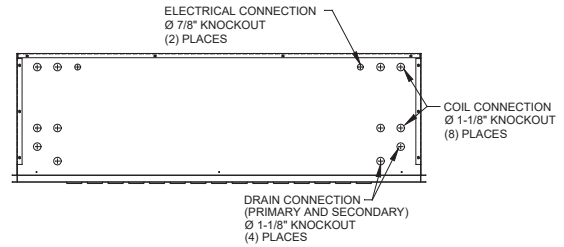


# HIGH PERFORMANCE DELUXE BOTTOM SUPPLY AND RETURN

HH-E / 600 - 1,200 CFM

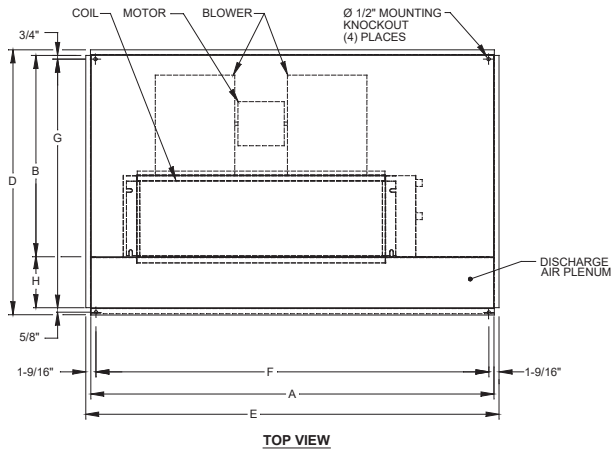

MODEL HH-Q	A	B	C	D	E	F	G	H	FILTER SIZE
600	54	25 7/8	11	39 3/8	55 3/8	52 1/4	37 1/8	12	12 x 25
800	54	25 7/8	12	45 3/8	55 3/8	52 1/4	43 1/8	18	12 x 25
1000	60	25 7/8	12	45 3/8	61 3/8	58 1/4	43 1/8	18	12 x 25
1200	60	25 7/8	12	45 3/8	61 3/8	58 1/4	43 1/8	18	12 x 25

- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder coated epoxy with a 1/4" thick closed cell insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- Coil connections: 3/4" CW on HH015-022 and, 1/2" HW on HH015-022.