


VERTICAL RECESSED

LV-R 200 - 1,200 CFM

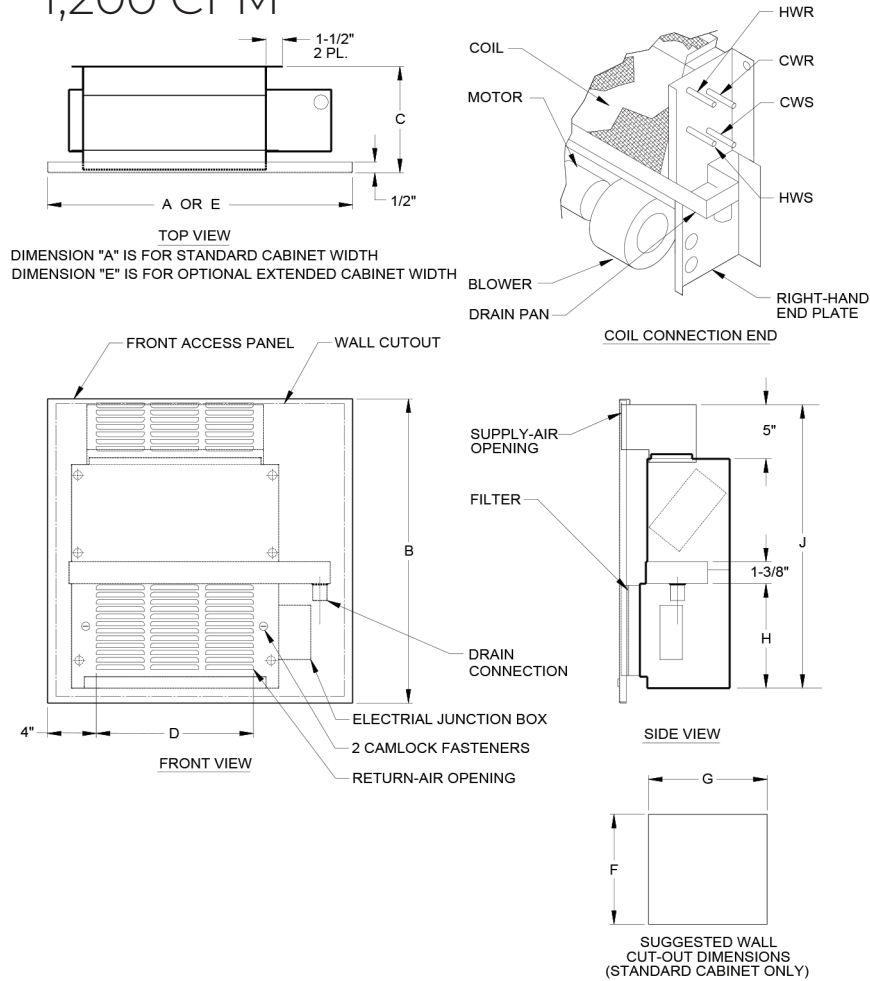

MODEL RECESSED	A	B	C	D	E	F	G	H	J	FILTER SIZE
200	30	30	11-1/2	17-1/8	35	28	28	10-1/4	27	10 x 20 x 1
300	30	30	11-1/2	17-1/8	36	28	28	10-1/4	27	10 x 20 x 1
400	41	30	11-1/2	26-3/4	46	28	39	10-1/4	27	10 x 31 x 1
600	46	30	11-1/2	31-1/4	51	28	44	10-1/4	27	10 x 36 x 1
800	47	33	13	31-1/4	52	31	45	12	30-1/4	11 x 34 x 1
1000	51	33	13	35-3/4	56	31	49	12	30-1/4	11 x 38 x 1
1200	55	33	13	35-1/4	60	31	53	12	30-1/4	11 x 42 x 1

- All sizes shown in inches.
- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder coated epoxy with a 1/8" thick Elastomeric insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- Coil connections: 1/2" CW on LV002-006, 3/4" CW on LV008-012 and 1/2" HW on LV002-012.