


# VERTICAL SLOPE TOP

## LV-S 200 - 1,200 CFM

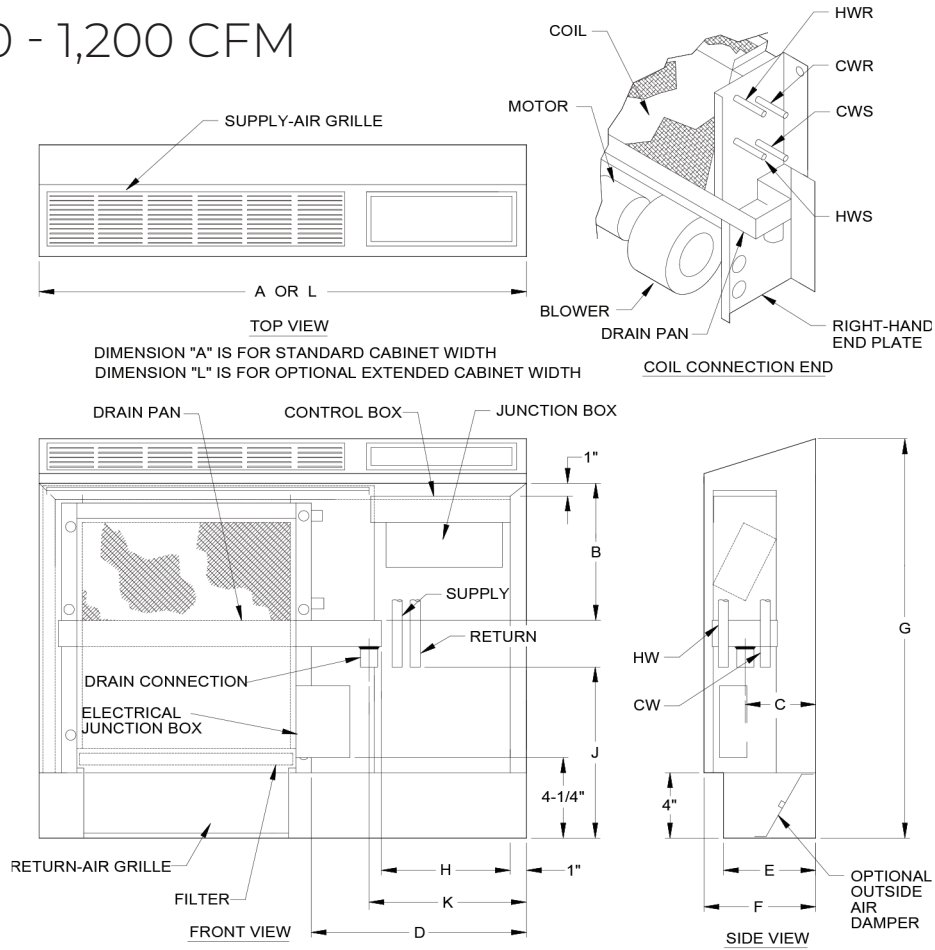

| MODEL DELUXE | A      | B      | C     | D      | E  | F      | G  | H      | J      | K      | L      | FILTER SIZE |
|--------------|--------|--------|-------|--------|----|--------|----|--------|--------|--------|--------|-------------|
| 200          | 35-1/4 | 11-3/8 | 6-3/4 | 14-1/8 | 8  | 11-1/4 | 30 | 7-7/8  | 10     | 9-5/8  | 40-7/8 | 10 x 20 x 1 |
| 300          | 35-1/4 | 11-3/8 | 6-3/4 | 14-1/8 | 8  | 11-1/4 | 30 | 7-7/8  | 10     | 9-5/8  | 40-7/8 | 10 x 20 x 1 |
| 400          | 52-1/8 | 11-3/8 | 6-3/4 | 18-1/2 | 8  | 11-1/4 | 30 | 13-7/8 | 10     | 15-3/4 | 57-3/4 | 10 x 31 x 1 |
| 600          | 52-1/8 | 11-3/8 | 6-3/4 | 13-1/4 | 8  | 11-1/4 | 30 | 8-3/4  | 10     | 10-1/2 | 57-3/4 | 10 x 36 x 1 |
| 800          | 57-3/4 | 14-5/8 | 8-1/2 | 18-1/8 | 10 | 12     | 34 | 13-3/8 | 11-7/8 | 15-1/8 | 63-3/8 | 11 x 34 x 1 |
| 1000         | 57-3/4 | 14-5/8 | 8-1/2 | 14-1/8 | 10 | 12     | 34 | 9-3/8  | 11-7/8 | 11-1/8 | 63-3/8 | 11 x 38 x 1 |
| 1200         | 69     | 14-5/8 | 8-3/4 | 21-1/4 | 10 | 12     | 34 | 16-3/4 | 11-7/8 | 18-1/2 | 66     | 11 X 42 X 1 |

- All sizes shown in inches.
- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder-coated epoxy with a 1/8" thick Elastomeric insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- Coil connections: 1/2" CW on LV002-006, 3/4" CW on LV008-012 and 1/2" HW on LV002-012.