
VERTICAL STACK HIGH RISE DR-B BASIC / DR-D DELUXE / 300 - 1,200 CFM

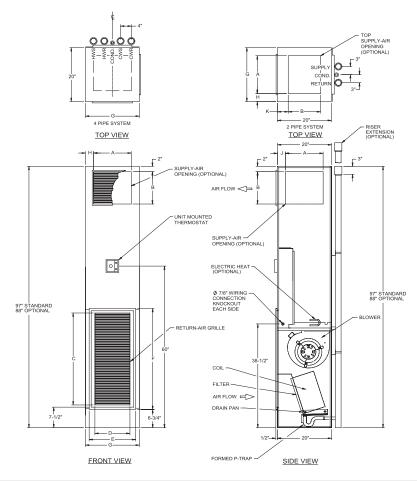

MODEL DR-B	DISCHARGE OPENING		RETURN AIR GRILLE		ACCESS PANEL						FILTER SIZE
	Α	В	С	D	E	F	G	Н	J	K	
300	14	12	34	13	17-1/2	37-1/2	20	3	3	4	12 x 15-1/2 x 1
400	14	12	34	13	17-1/2	37-1/2	20	3	3	4	12 x 15-1/2 x 1
500	14	12	34	13	17-1/2	37-1/2	20	3	3	4	12 x 15-1/2 x 1
600	16	14	34	17	20-1/2	37-1/2	24	4	2	3	12 x 15-1/2 x 1
800	16	14	34	17	20-1/2	37-1/2	24	4	2	3	12 x 15-1/2 x 1
1000	16	14	40	17	20-1/2	43-1/2	24	4	2	3	18 x 19-1/2 x 1
1200	16	14	40	17	20-1/2	43-1/2	24	4	2	3	18 x 19-1/2 x 1

- \cdot Coil connections may be right, left or rear.
- · Coil connections determined by facing the return air grille.
- · Electrical junction box is located above the blower and motor assembly.
- · Unit must be installed level and condensate drain lines should be trapped.
- · Removable drain pan is powder coated epoxy with a 1/8" thick Elastomeric insulation and has 3/4" NPT primary and secondary drain connections.
- · Entire cabinet, scroll and blower wheel are heavy gauge, galvanized steel.
- · Coil Connections: 1/2" CW on DR003-006, 3/4" on DR008-012 and 1/2" HW on DR003-012.