


# VERTICAL DELUXE

## LV-D 200 - 1,200 CFM

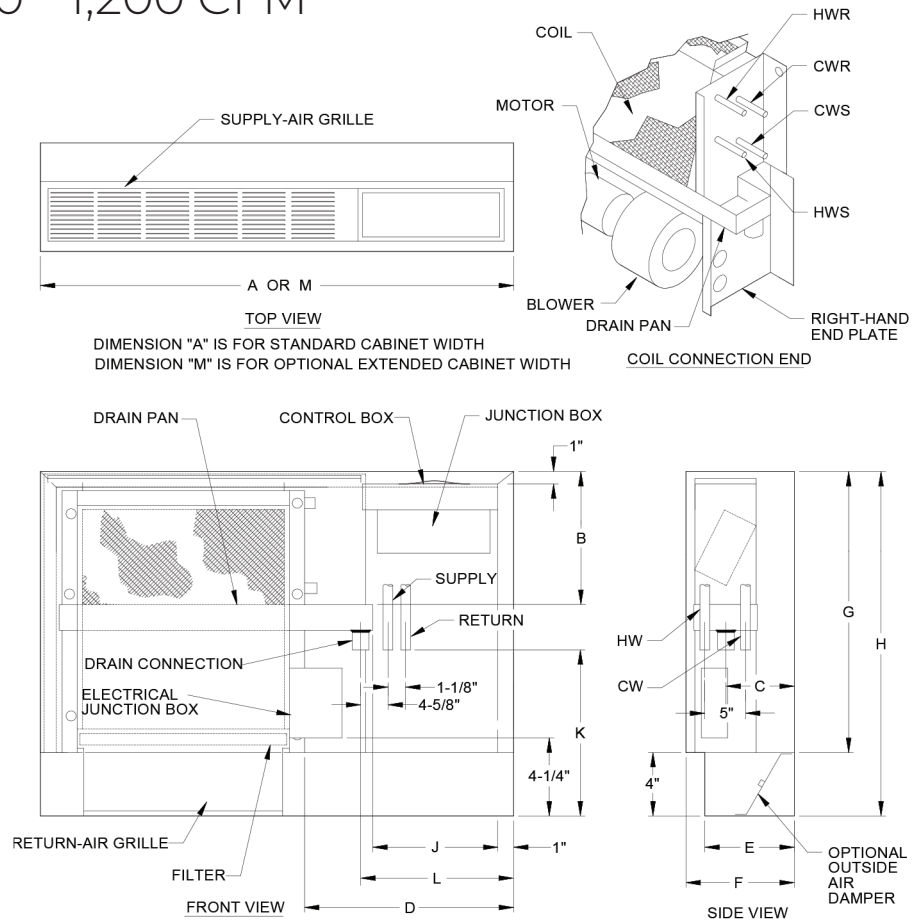

MODEL DELUXE	A	B	C	D	E	F	G	H	J	K	L	M	FILTER SIZE
200	35-1/4	11-3/8	6-3/4	14-1/8	8	11-1/4	22	26	7-7/8	10	9-5/8	40-7/8	10 x 20 x 1
300	35-1/4	11-3/8	6-3/4	14-1/8	8	11-1/4	22	26	7-7/8	10	9-5/8	40-7/8	10 x 20 x 1
400	52-1/8	11-3/8	7	18-1/2	8	11-1/4	22	26	13-7/8	10	15-3/4	57-3/4	10 x 31 x 1
600	52-1/8	11-3/8	7	13-1/4	8	11-1/4	22	26	8-3/4	10	10-1/2	57-3/4	10 x 36 x 1
800	57-3/4	13-5/8	8-1/2	18-1/8	10	12	26	30	13-3/8	11-7/8	15-1/8	63-3/8	11 x 34 x 1
1000	57-3/4	13-5/8	8-1/2	14-1/8	10	12	26	30	9-3/8	11-7/8	11-1/8	63-3/8	11 x 38 x 1
1200	69	13-5/8	8-3/4	21-1/4	10	12	26	30	16-3/4	11-7/8	18-1/2	66	11 X 42 X 1

- All sizes shown in inches.
- Right hand unit shown, left hand unit opposite.
- Coil connections determined by facing the supply air opening.
- Electrical junction box is located on the same side as the coil connections.
- Unit must be installed level and condensate drain lines should be trapped.
- Drain pan is powder-coated epoxy with a 1/8" thick Elastomeric insulation and has 3/4" NPT primary and secondary drain connections.
- Entire cabinet, scroll and blower wheel are heavy-gauge, galvanized steel.
- Coil connections: 1/2" CW on LV002-006, 3/4" CW on LV008-012 and 1/2" HW on LV002-012.